


FORD TRUCKS 2633 DC REAR STEERABLE EURO6

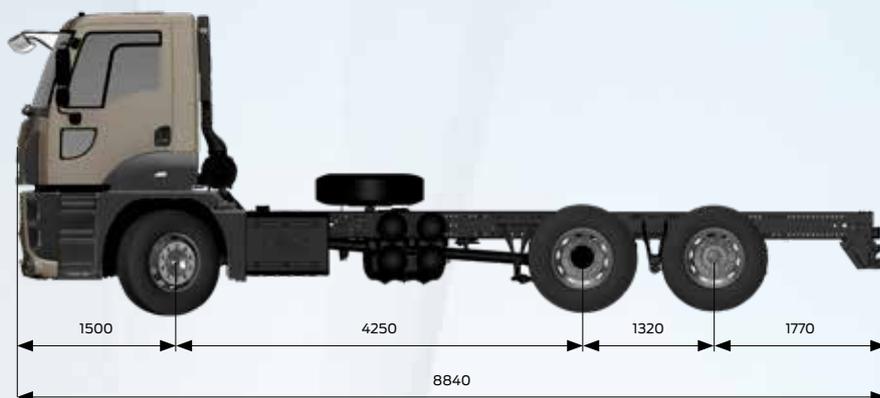

Basic Features

| | |
|----------------|------------|
| Vehicle Type | Road Truck |
| Axle | 6x2/4 |
| Emission | Euro 6 |
| Cabin Type | Day Cab |
| Wheelbase (mm) | 4250 |

Engine

| | |
|--------------------|------------------------------------|
| Type | Ecotorq 9 liters |
| Displacement (cc) | 8974 |
| Diameter x Stroke | 115 mm x 144 mm |
| Power | 330 PS (243 kW) @ 1655 - 2200 rpm* |
| Torque | 1300 Nm @ 1200-1700 rpm |
| Compression Ratio | 17,6 : 1 |
| Oil Filling Volume | 30L |
| Coolant Volume | 46L |

* Maximum power can be taken between 1700 - 2200 rpm with vertical exhaust option.

Transmission

| | |
|----------------------------------------------------|-------------------------|
| Clutch | 430mm Single Disc |
| Manuel Transmission / Ratios (1. gear - 9. gear) | 9+1 Speed (9,48 - 0,75) |
| Automated Transmission / Ratios (1. gear - 9.gear) | 9+1 Speed (9,48 - 0,75) |

Steering

Power Assisted Single Circuit

Chassis

| | |
|-------------------------|-----------------------------------------|
| Chassis Thickness (mm) | 7mm with Reinforcement |
| Chassis Strength [MPa] | 355 Mpa |
| Suspension (Front/Rear) | Parabolic Leaf Springs / Air Suspension |
| Axle (Front/Rear) | Standard Single Reduction |
| 5th Wheel Options | 4,375 |
| Tyres | 315/70 R 22,5 |
| Wheel Rim | 22,5 x 9 Steel |

Braking System

| | |
|-----------------------------------------|-----------------------------------------------------------------------------------|
| Brakes (Front/Rear) (Ø.mm x mm. Length) | 430 x 45, Disc Brake |
| Braking System | Dual Brake Circuit – Air Processing Unit with Integrated Oil Separator and Heater |
| Engine Brake Power | max. 220 kW (Engine Level) |

Electrical System

| | |
|----------------------------|----------------|
| Battery | 150 Ah |
| Alternator / Starter Motor | 130 A / 6.5 kW |

Tanks

| | |
|-----------|-------|
| Fuel Tank | 400 L |
| SCR Tank | 55 L |



Sharing the load

Dimensions (mm)

| | |
|---------------------------------------|------|
| Front Overhang | 1500 |
| Wheelbase | 4250 |
| Overall Length | 8850 |
| Overall Cab Length | 1820 |
| Height @Curb (w/o Rails) | 3130 |
| Rear Overhang | 1780 |
| Overall Vehicle Width (Excl. Mirrors) | 2540 |

| Weights (kg) | 1. Axle | 2. Axle | 3. Axle | Total |
|---------------------------------|---------|---------|---------|-------|
| Technically Permissible Weights | 7150 | 11500 | 7500 | 26000 |
| Kerb Weight * | 4648 | 2184 | 939 | 7771 |
| Payload | 2502 | 9316 | 6561 | 18229 |
| Legally Permissible Weight | 7150 | 11500 | 7500 | 26000 |

STANDARD EQUIPMENT

- Air Conditioner
- Radio/CD Player
- Disc Brake
- Engine Brake
- 4 Point Independent Cab Suspension for Day Cab
- Cruise Control
- Electrically Operated Windows
- Electrically Operated and Heated Side Mirrors
- Electrically Operated Headlamp Leveling
- Rake and Reach Adjustable Steering Column
- Hill Launch Assist
- Heated and Air Suspended Driver Seat
- Ventilation Roof
- Lumbar Support
- Electronic Brake System (EBS) including
- Anti-lock Brake System (ABS)
- Electronic Stability Control (ESP)
- Advanced Emergency Braking System (AEBS)
- Lane Departure Warning System (LDWS)
- Brake Lining Wear Sensor
- Immobilizer
- Auto Lights
- Single Key with Remote Control and Central Locking
- Home Safe
- Differential Lock
- Front Fog Lamps
- Rear Fog Lamps
- Digital Tachograph
- Switchable Air Compressor
(For Improved Fuel Economy)
- Tag Axle Lifting (including auto drop)
- Steerable Rear Axle

OPTIONAL EQUIPMENT

- Transmission Driven PTO & Interior Control units
- ADR Pack
- Cold Pack with Wet Type Cab Heater
- Electrically Operated Cab Tilting
- Rain Sensor
- Auto Light Sensor
- Automated Transmission
- High Roof & Low Roof Sleeper Cab Availability
- 8 Ton Front Axle Capacity with 315/80 R22.5 Tire & 4,375 FDR